

MATERIAALIT:

- Valurauta GGG50
- Tiiviste: EPDM
- Pulttia:
Ruostumaton teräs A2
- Korroosiosuoja: Epoksi
enl DIN 30677-2

KYSY MEILTÄ


Tiiviste NBR

IBECO D korjausmuhvi

IBECO D-korjausmuhvia käytetään vuotavien teräs- tai valurautaholkkien korjauksessa



| Tuote. nr. | RSK nr. | DN | Jänneväli mm |
|------------------|-----------|-----|-----------------|
| 0532-062-068-10E | 114 29 47 | 50 | 62- 68 |
| 0532-075-084-10E | 114 29 48 | 65 | 75- 84 |
| 0532-094-100-10E | 114 29 49 | 80 | 94- 100 |
| 0532-114-120-10E | 114 29 50 | 100 | 114- 120 |
| 0532-166-173-10E | 114 29 51 | 150 | 166- 173 |
| 0532-217-224-10E | 114 29 52 | 200 | 217- 224 |
| 0532-270-276-10E | 114 29 53 | 250 | 270- 276 |
| 0532-321-328-10E | 114 29 54 | 300 | 321- 328 |
| 0532-373-380-10E | 114 29 55 | 350 | 373- 380 |
| 0532-424-431-10E | 114 29 56 | 400 | 424- 431 |
| 0532-527-534-10E | 114 29 57 | 500 | 527- 534 |
| 0532-630-638-10E | 114 29 58 | 600 | 630- 638 |

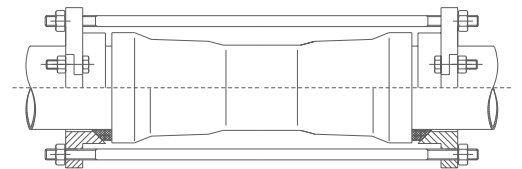

HYVÄKSYTTY



ISO 9001:2008